



High Performance Erosion Control

Absolutely The Most Effective Erosion Control Medium Available.

When your site demands the most from your erosion control solution, you need to demand Flexterra® High Performance-Flexible Growth Medium® (HP-FGM®) — the pinnacle of the erosion control industry. Fine grading and extensive soil preparation are unnecessary, allowing you to apply the product for immediate protection and superior performance at reduced overall costs.

Flexterra HP-FGM Delivers:

- The highest germination and vegetative establishment when compared to any rolled blanket or other hydraulically applied mulch available
- Greater than 99% erosion control effectiveness immediately upon application
- 100% biodegradability
- Safe for even the most sensitive environments because it's non-toxic



HP Technology: Greener By Design


100% recycled, Thermally Refined® virgin wood fibers produce the highest yield and coverage per unit weight and are phyto-sanitized, eliminating weed seeds and pathogens



100% biodegradable, interlocking fibers increase mechanical bonding of the matrix to provide immediate performance upon installation

100% non-toxic biopolymers and water absorbents enhance erosion resistance and vegetative establishment

Revolutionary patented Micro-Pore particles optimize water and nutrient retention

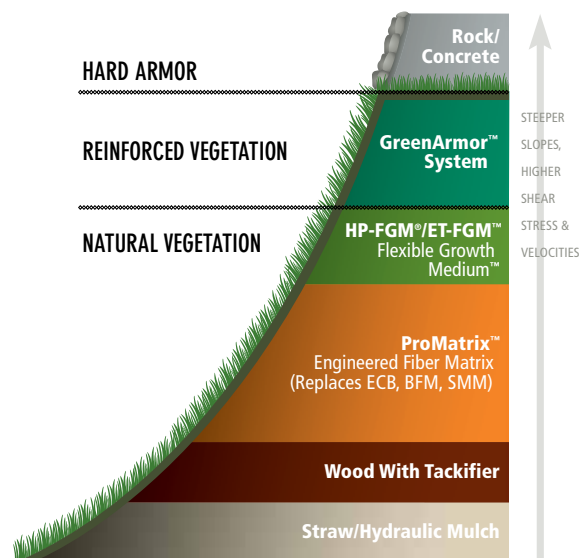

Flexterra® HP-FGM® Technical Data:

	TEST METHOD	UNITS	TESTED VALUE
PHYSICAL PROPERTIES*			
Mass/Unit Area	ASTM D6566 ¹	g/m ² (oz/yd ²)	≥ 390 (11.6)
Thickness	ASTM D6525 ¹	mm (in)	≥ 5.6 (0.22)
Ground Cover	ASTM D6567 ¹	%	≥ 99
Water-Holding Capacity	ASTM D7367	%	≥ 1,700
Material Color	Observed	n/a	Green
ENVIRONMENTAL PROPERTIES*			
Biodegradability	ASTM D5338	n/a	Yes
Ecotoxicity	EPA 2021.0	%	48-hr LC ₅₀ > 100%
Effluent Turbidity	Large Scale ⁵	NTU	< 250
PERFORMANCE PROPERTIES*			
Cover Factor ²	Large Scale ⁵	n/a	≤ 0.01
Percent Effectiveness ³	Large Scale ⁵	%	≥ 99
Functional Longevity ⁴	ASTM D5338	months	≤ 18
Cure Time	Observed	hours	0-2
Vegetation Establishment	ASTM D7322 ¹	%	≥ 800
PRODUCT COMPOSITION			TYPICAL VALUE
Thermally Processed ⁶ (within a pressurized vessel) 100% Recycled Virgin Wood Fibers			80%
Wetting agents (including high-viscosity colloidal polysaccharides, cross-linked biopolymers, and water absorbents)			10%
Crimped Biodegradable Interlocking Fibers			5%
Micro-Pore Granules			5%

* When uniformly applied at a rate of 3,500 lb/ac (3,920 kg/ha) under laboratory conditions.

1. ASTM test methods developed for Rolled Erosion Control Products that have been modified to accommodate Hydraulic Erosion Control Products.
2. Cover Factor is calculated as soil loss ratio of treated surface versus an untreated control surface.
3. Percent Effectiveness = One minus Cover Factor multiplied by 100%.
4. Functional Longevity is the estimated time period, based upon field observations, that a material can be anticipated to provide erosion control and agronomic benefits as influenced by composition, as well as site-specific conditions, including; but not limited to—temperature, moisture and light conditions, soils, biological activity, vegetative establishment and other environmental factors.
5. Large Scale testing conducted at Utah Water Research Laboratory. For specific testing information please contact a Profile technical service representative at 800-508-8681 (US and Canada) or +1-847-215-1144 (International).
6. Heated to a temperature greater than 193 degrees C (380 degrees F) for 5 minutes at a pressure greater than 345 kPa (50 psi) in order to be Thermally Refined®/Processed and to achieve phyto-sanitization.

SETTING THE BAR EVEN HIGHER

Better Erosion Control—Flexterra® HP-FGM® immediately bonds to the soil surface. Its flexible yet stable matrix retains > 99% of soil, vastly reducing turbidity of runoff for up to 18 months.

Greater Seed Germination and Growth—Flexterra HP-FGM delivers the highest growth establishment in the market, ≥ 800% via ASTM D7322, due to a combination of optimized water and nutrient retention.

Safer for the Environment—Unlike rolled erosion control blankets, Flexterra HP-FGM has no nets or threads to endanger wildlife. It uses 100% biodegradable crimped interlocking fibers and 100% recycled and phyto-sanitized wood fibers. Flexterra HP-FGM is 100% safe in even the most sensitive environments.

Earth-Friendly and Sustainable Results—Flexterra HP-FGM is a result of Profile's Green Design Engineering™, creating cost-effective and environmentally superior solutions through the design, manufacture and application of sustainable erosion control and vegetation establishment technologies.



**GREEN DESIGN
ENGINEERING™**
EARTH-FRIENDLY SOLUTIONS
FOR SUSTAINABLE RESULTS™

Green Design Engineering™ is a holistic approach that combines agronomic and engineering expertise with advanced technologies to provide cost-effective and earth-friendly solutions. Profile strives to deliver Green Design Engineering across our team of consulting professionals, innovative products and educational resources.



PS³ is a free, comprehensive 24/7 online resource you can use to design a project and select the right products that address both the physical and agronomic needs of your site. It will help you develop holistic, sustainable solutions for cost-effective erosion control, vegetation establishment and subsequent reductions in sediment and other pollutants from leaving disturbed sites. Because good plans start with the soil, PS³ offers free soil testing to ensure this critical step is considered. To access the site, design your project and take advantage of a free soil analysis, visit profileps3.com.



Solutions for your Environment™

For technical information or distribution, please call 800-508-8681.
For customer service, call 800-366-1180.

For warranty information, visit profileproducts.com.

750 W. Lake Cook Road • Suite 440
Buffalo Grove, IL 60089

profileproducts.com

© 2019 PROFILE Products LLC.
All rights reserved.

Profile, Thermally Refined, Flexterra, HP-FGM and High Performance-Flexible Growth Medium are registered trademarks of PROFILE Products LLC. ET-FGM, Flexible Growth Medium, GreenArmor, ProMatrix, Green Design Engineering, Earth-Friendly Solutions for Sustainable Results and Solutions for your Environment are trademarks of PROFILE Products LLC.



Find us on

facebook.com/profileEVS

HP-01 02/19



Hong Kong | Singapore | Malaysia | Australia

Email: info@centaur-asiapacific.com

Website: www.centaur-asiapacific.com

